



NOTES:

- I. IT IS THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR TO ENSURE THAT THE FINAL EQUIPMENT INSTALLATION MEETS ALL APPLICABLE CODE REQUIREMENTS.
- 2. ILLUSTRATION SHOWN IS FOR GENERAL REPRESENTATION ONLY. ACTUAL PRODUCT WILL VARY DEPENDENT UPON APPLICATION.

3. OVERALL DIMENSIONS: 52.0 L X 34.9 W X 41.9 H.

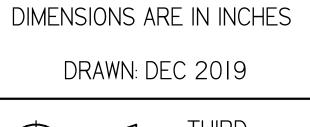

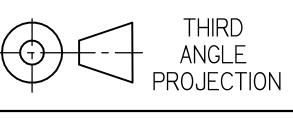


HUSSMANN HIGH EFFICIENCY H-SERIES MEDIUM INDOOR STD BASE

°PD-000000005


INFORMATION SUBJECT TO CHANGE

SHEET I OF 3

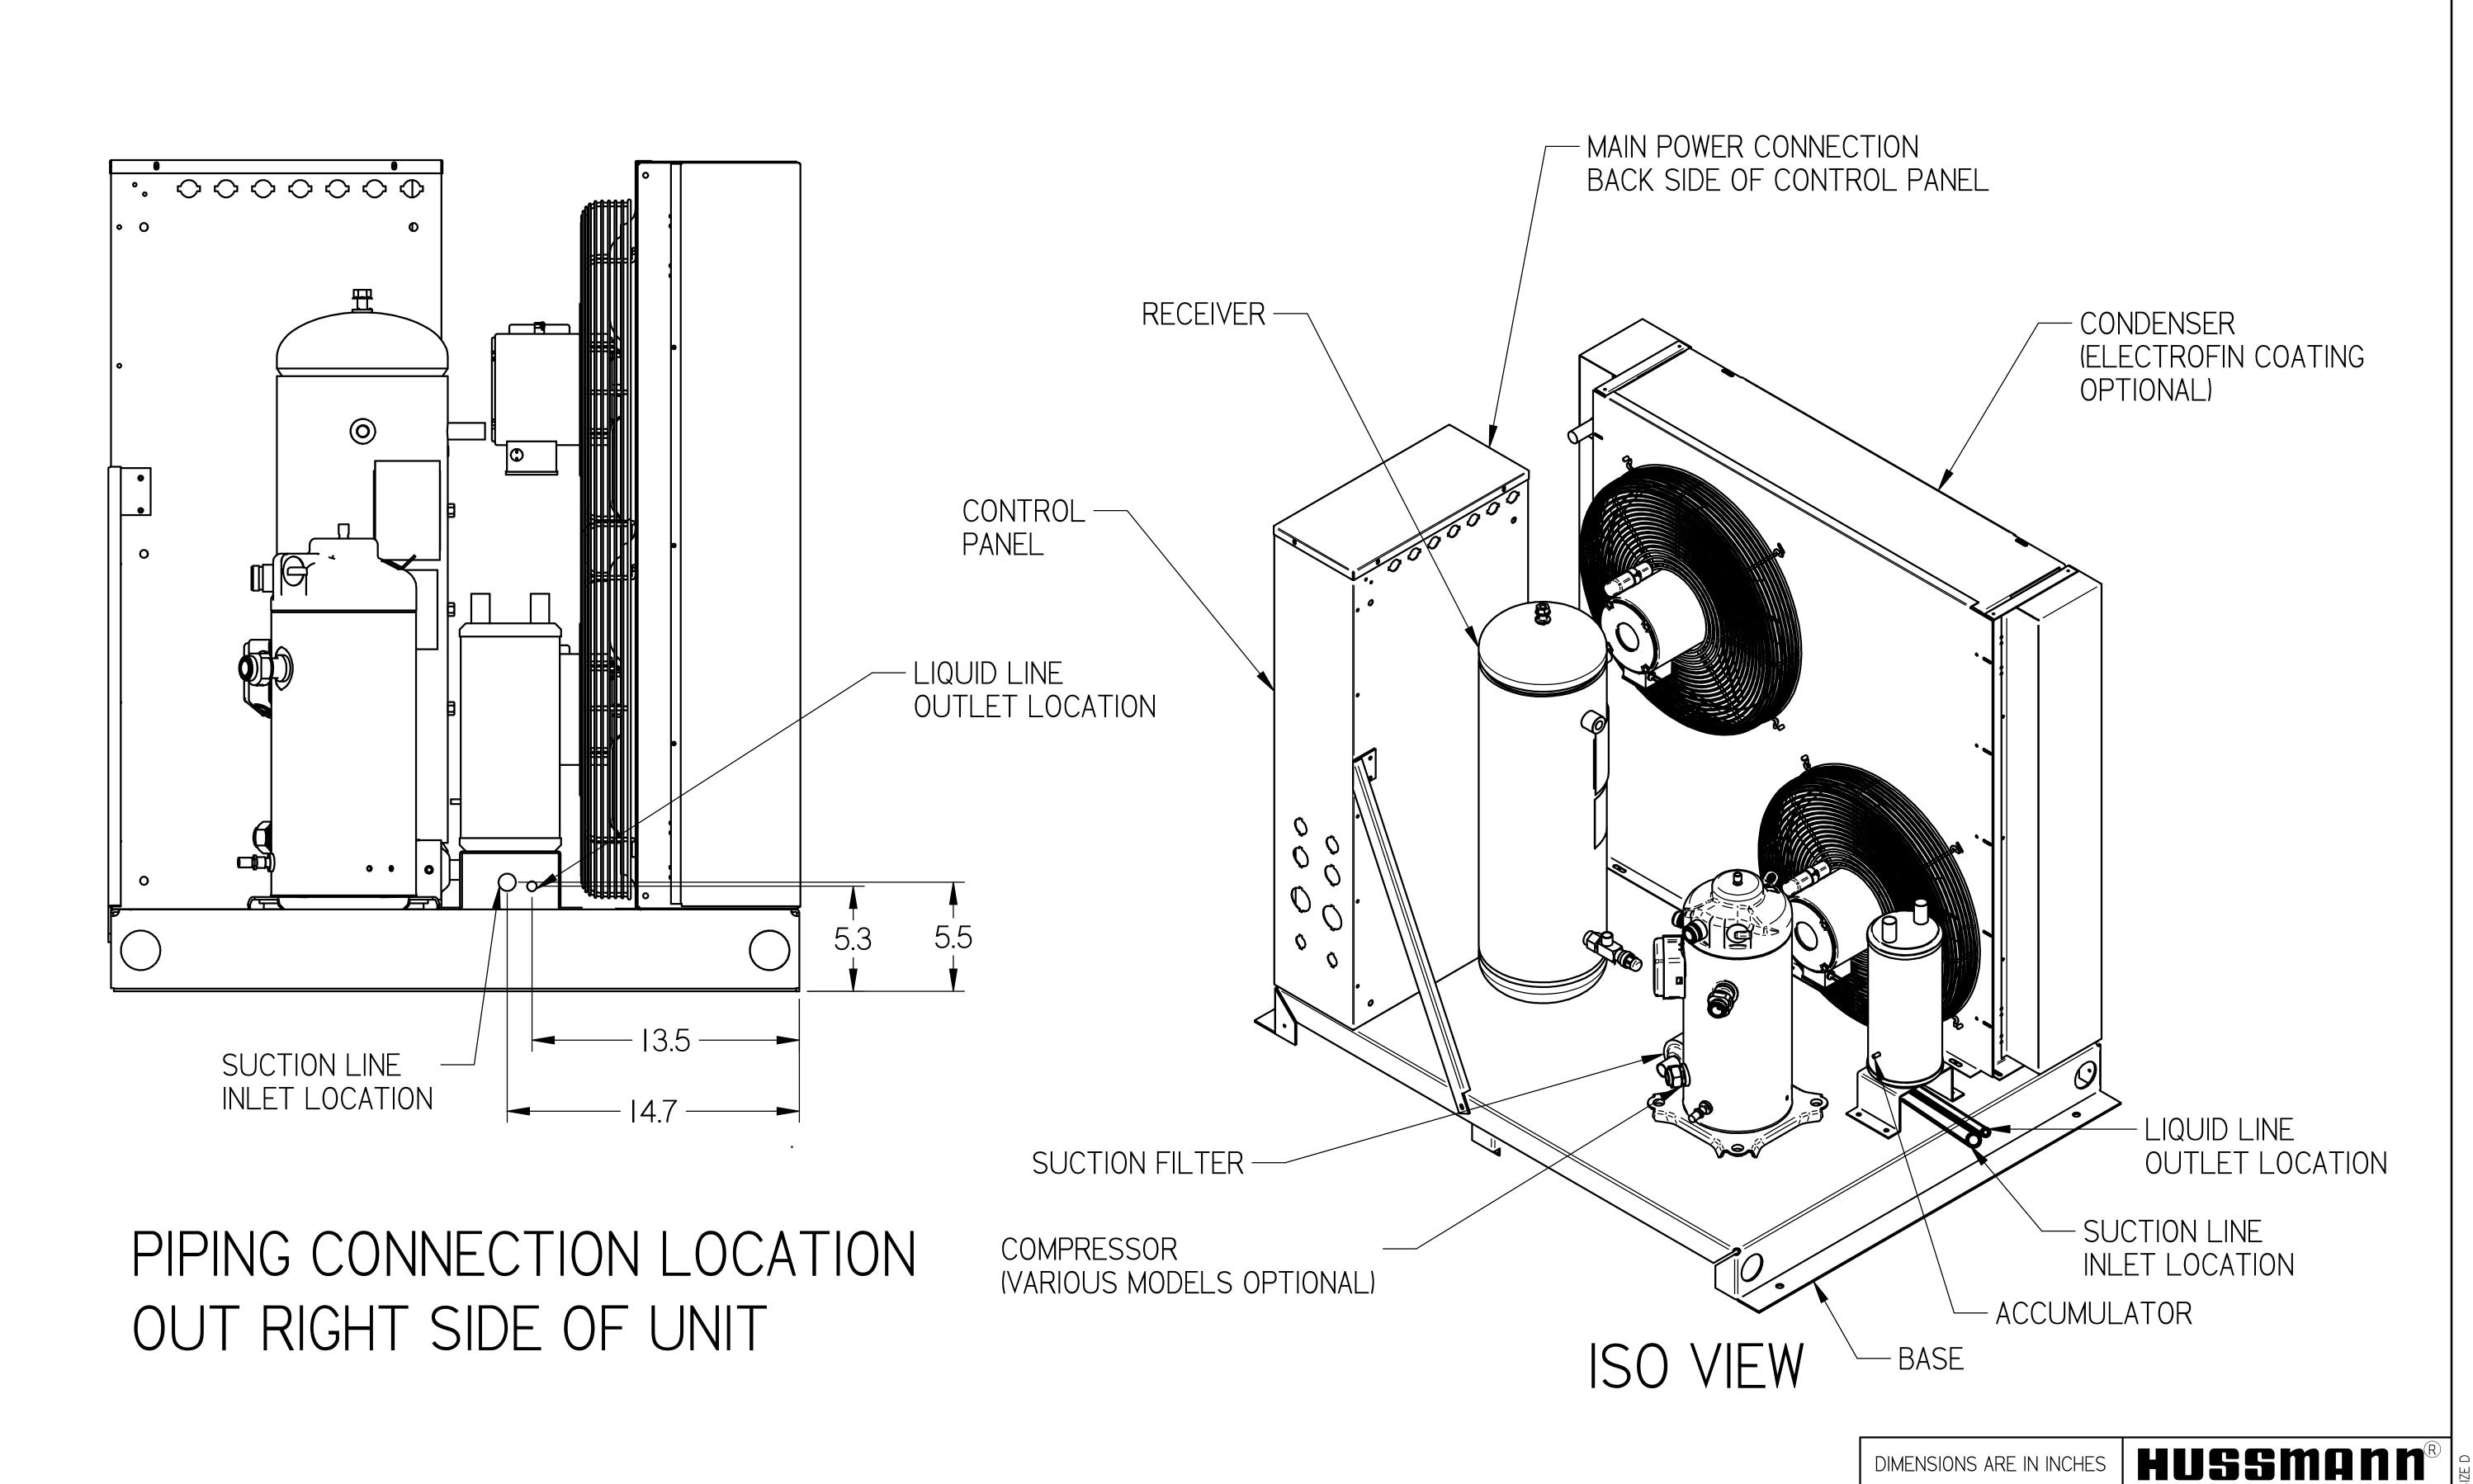

NOTES:

- I. IT IS THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR TO ENSURE THAT THE FINAL EQUIPMENT INSTALLATION MEETS ALL APPLICABLE CODE REQUIREMENTS.
- 2. ILLUSTRATION SHOWN IS FOR GENERAL REPRESENTATION ONLY. ACTUAL PRODUCT WILL VARY DEPENDENT UPON APPLICATION.
- 3. OVERALL DIMENSIONS: 52.0 L X 34.9 W X 41.9 H.

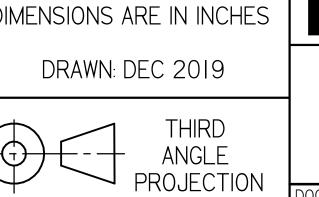

HIGH EFFICIENCY H-SERIES MEDIUM INDOOR STD BASE

INFORMATION SUBJECT TO CHANGE

PD-00000005

MINIMUM CLEARANCE REQUIREMENTS: ACTUAL CLEARANCE REQUIREMENTS ARE DEPENDENT UPON AUTHORITY HAVING JURISDICTION, AND MAY LOUVERED WALL EXCEED DIMENSIONS SHOWN. 30.0 CLEARANCE BETWEEN INLET OF CONDENSER AND INSIDE OF LOUVERED WALL LIVE PANEL 30.0 48.0 42.0 WALL CONTROL PANEL FACING LEFT 42" CLEARANCE BETWEEN CONTROL END OF UNIT PANEL & ANY WALL. 30.0

NOTES:

I. IT IS THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR TO ENSURE THAT THE FINAL EQUIPMENT INSTALLATION MEETS ALL APPLICABLE CODE REQUIREMENTS.


48" CLEARANCE BETWEEN CONTROL

PANEL & ANY LIVE PANEL.

2. ILLUSTRATION SHOWN IS FOR GENERAL REPRESENTATION ONLY. ACTUAL PRODUCT WILL VARY DEPENDENT UPON APPLICATION.

3. OVERALL DIMENSIONS: 52.0 L X 34.9 W X 41.9 H.

DIMENSIONS ARE IN INCHES DRAWN: DEC 2019



ANGLE PROJECTION

H-SERIES MEDIUM INDOOR STD BASE

PD-00000005 [

HUSSMANN

HIGH EFFICIENCY

INFORMATION SUBJECT TO CHANGE

SHEET 3 OF 3