



H-Series A2L

HIGH-EFFICIENCY OUTDOOR CONDENSING UNIT



ADVANTAGES

- A2Ls are synthetic, mildly flammable refrigerants that meet low GWP regulatory requirements and offer the greatest ease of use for technicians compared to other solutions
- Wide variety of compressors available, including multiple scroll and reciprocating options, offering a high degree of customization with published AWEF ratings
- Standard frames with vertical receivers and heavy-duty frames with horizontal receivers available for all size and compressor configurations



KEY FEATURES

- Standard coated, corrosion-resistant front screen
- High-efficiency fan motors and blade design
- Low and medium temperature application units available in all sizes
- Ambient temperature control included on multiple fan units to cycle off half the fans below 40° F (4.4° C)
- Corrosion-resistant coil coating option available
- Optional suction accumulator, suction filter, and suction insulator available
- DOE/NRCan compliant models available in hundreds of configurations



Extra-Large Unit with Standard Frame



H-Series A2L High-Efficiency Outdoor Condensing Unit


SPECIFICATIONS

Model	H-Series A2L
Available Refrigerant Configurations	A2L (R-454A or R-454C)
Supply Power	208–230 VAC / 1-phase / 60 Hz 208–230 VAC / 3-phase / 60 Hz 460 VAC / 3-phase / 60 Hz 575 VAC / 3-phase / 60 Hz

For information about unit-specific compressors, electrical data, connection sizes, and other detailed specifications, please consult the unit datasheet.

DIMENSIONS

Large units shown, other sizes will vary in number of fans/physical appearance.

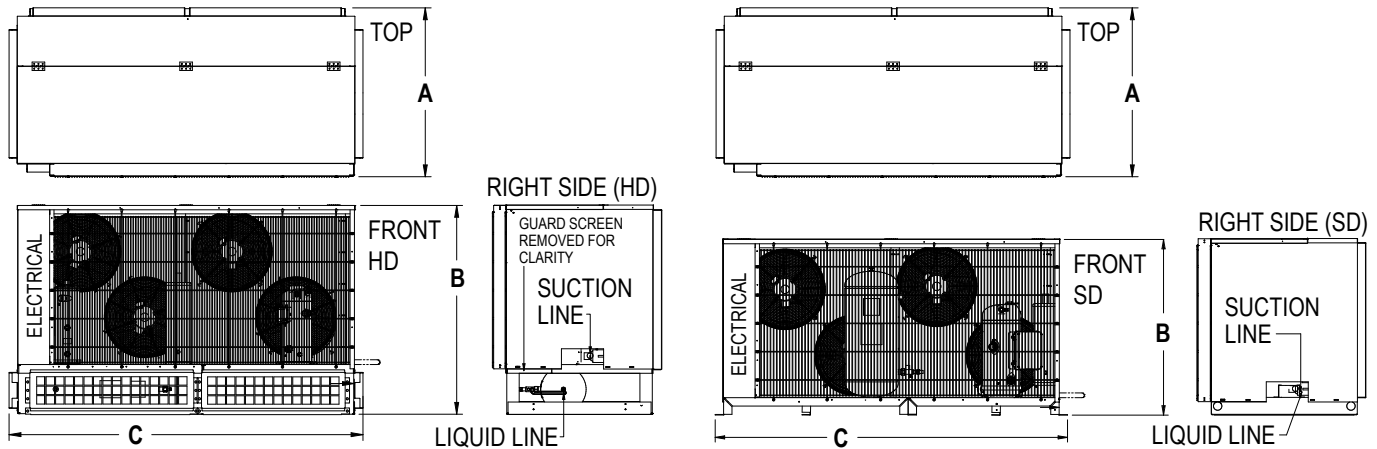

Model	A	B	C
Small with Standard Base	37 5/8 (955)	24 3/8 (619)	41 5/8 (1,059)
Medium with Standard Base	40 1/8 (1,021)	42 (1,067)	48 (1,219)
Large with Standard Base	40 1/8 (1,021)	42 (1,067)	84 (2,134)
Extra Large with Standard Base	40 1/8 (1,021)	54 1/2 (1,384)	99 (2,515)
Small with Heavy-Duty Base	37 5/8 (955)	32 1/8 (816)	42 (1,067)
Medium with Heavy-Duty Base	40 1/8 (1,021)	49 5/8 (1,260)	48 1/8 (1,222)
Large with Heavy-Duty Base	40 1/8 (1,021)	49 5/8 (1,260)	84 1/4 (2,139)
Extra Large with Heavy-Duty Base	40 1/8 (1,021)	62 1/8 (1,578)	99 1/4 (2,520)

NOTE: Dimensions are in Inches (millimeters)

NOTE: Use Krack's technical datasheets to get detailed dimensions for all store layout purposes.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped. For additional resources, contact your representative or visit www.hussmann.com.



Krack, a Hussmann Corporation brand

For all customers inquiries, visit www.krack.com or call 1.800.922.1919

www.krack.com
www.hussmann.com